ALKU(S,D)-40W(NA)

THE WORLD's SMALLEST OUTDOOR 40W Ku-Band BUC High Temp +70C

FEATURES:

- Hyper-Light Package Design Only 6.3 lbs
- Extreme Stability, Reliability and Performance
- Built-in HPA Overdrive Circuit Protection
- Built-in Optimized Linearization
- Built-in Ultra Receive Band Reject Filter
- Built-in Anti Vibration Technology
- Built-in DC Input Noise Suppression Filter
- Extreme GaN Linearity and Efficiency
- Exceeds ALL IESS-308/309 Phase Noise Standards
- Triple protection sealed waveguide output
- Field Replaceable IP68 Rated Fans
- AC Power 85-260VAC
- Fully Assembled, and Rigorously Tested in the USA
- 3-Year Warranty

DESIGN OVERVIEW:

The "LIGHTWEIGHT" series Extended (13.75 - 14.5GHz), Standard (14.0 - 14.5GHz) and Dual (13.75 - 14.5GHz | 14.0 -14.5GHz) Frequency 40W Ku-Band BUCs are the next generation of the World's Smallest feed-horn & boom-arm mountable BUCs in the industry, weighing-in only at 6.3 lbs and working at high temp up to 70°C.

PERFORMANCE SPECIFICATIONS

Operating RF Frequency	ALKS 14.0 - 14.5 GHz ALKU 13.75 -14.5 GHz ALKD 13.75 -14.5 | 14.0 - 14.5 GHz
Operating IF frequency	950 - 1700 MHz | 950 - 1450 MHz
Local Oscillator	12.80 GHz | 13.05 GHz
Rated Output Power PSAT **Linear Power SR @-26 dBc PLIN**	40W 46.0 dBm 32W 45.0 dBm
IMD3 (two tones) 3 dB Back Off	-25 dBc max. 2 signal 5 MHz apart at P-LINEAR
Spectral Regrowth at P-LINEAR (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2 dB back-off from rated power)	-30 dBc
10 MHz External Ref. (Internal High Stability Optional)	10 MHz Ref. Level: 0 dBm +/- 5 dBm Internal Ref. Stability +/- 0.1 ppm

SPURIOUS & PHASE NOISE

In-Band/Out-band Spurious	-60 dBc max.	
Group Delay	Ripple 1 nsec point to point max.	
AM/PM Conversion	1.0°/dB max. at 3 dB output backoff	
Noise Power Density (TX)	-85 dBm/Hz	
Noise Power Density (RX)	-155 dBm/Hz	
Phase Noise (Up Converter)|(Ext. Ref.)	-55 dBc/Hz @ 10 Hz -65 dBc/Hz @ 100 Hz -75 dBc/Hz @ 1 kHz -85 dBc/Hz @ 10 kHz -95 dBc/Hz @ 100 kHz	-115 dBc/Hz -135 dBc/Hz -150 dBc/Hz -155 dBc/Hz -160 dBc/Hz

PROTECTION

VOLTAGE	OVERTEMP	VSWR
SMART ALARMS IN THE M&C	MICROPHONIC	CURRENT

COMPLIANCE INFORMATION

MIL-STD-188/164C MIL-STD-461E	DO-160G	ROHS, REACH, WEEE

POWER CONSUMPTION

40W 46.0 dBm PSAT	190W
32W 45.0 dBm PLIN	155W

ENVIROMENT SPECIFICATIONS

Environmental MIL-STD **Vibration MIL-STD**	Compliant with MIL-STD810E MIL-STD810F, Method 514.5
Operating Temperature Range	- 40° C to + 70° C
Storage Temperature Range	- 60° C to + 85° C
Fan Rating / Field Replaceable	IP68, Ultra Long Life
Humidity	100% Condensing, IP67 Rated
Shock	20 g peak, 11 msec, 1/2 sine
Altitude	21,500 ft, 6,500 m

M&C INTERFACE

Advanced Monitor & Control	Ethernet Web Page Based, SNMP, RS232/485, FSK (opt.)
ALARMS	PLL LOCK, HPA, VSWR, MUTE, TX
Stealth PLIN Operation Mode	LED Shut-Off | Silenced fans

MECHANICAL SPECIFICATIONS

Dimensions (AC Powered)	6.55" x 3.94" x 4.93" (166 × 100 × 125 mm) Without Connectors
Weight (AC Powered)	6.3 lbs (2.86 kg)

PART NUMBERING SYSTEM

AL - "LIGHTWEIGHT" MODEL SERIES
KU - Universal Ku-Band 13.75 - 14.50 GHz
KS - Standard Ku-Band 14.0 - 14.50 GHz
KL - Low Ku-Band 12.75-13.25 GHz
KD - Dual Ku-Band 13.75 - 14.50 GHz | 14.0 - 14.50 GHz
40 | 50 | 60 | 80 - Rated Power in Watts
N | F - 50 Ohm or 75 Ohm IF Input Connector Type
M - Full M&C Option RS232/485, SNMP, Ethernet
A - AC Power 85-260VAC (increases size and weight)
R - 10 MHz Ref. Auto Sense | Internal Reference
K - FSK Option
U - Universal Mounting Bracket
J - Weatherproof DC/RJ45 Cable Dongle
C xxxx - Custom RAL Color Code
L - Custom Language
P - Custom Part number
B - Custom Label
G - Custom Logo
T - Redundancy Ready
H - High Gain (+79 dB - 82 dB)
W - Weatherproof Pelican Style Case
O - Other Custom Option
X - Custom Cable

Visit Product Page

INPUT|OUTPUT INTERFACE

IF Connector	N-type (50 Ohm) | F-type (75 Ohm)
Universal Prime Power via 3pin Power Connector Aphenol PT02E-12-3P, Current Protection	+ 85-260 VAC
Output VSWR	1.3:1
Output Interface	WR75 Grooved
Input VSWR	1.5:1
10 MHz External Ref. **(Internal High Stability +/- 0.1 ppm Option Available)**	10 MHz Ref. Level: 0 dBm +/- 5 dBm Internal Ref. Stability +/- 0.1 ppm

GAIN

Gain (Temperature Compensated)	66 dB (min.) 72 dB (typ.)
TX Gain Flatness	± 0.75 dB max. over 40 MHz
TX Gain variation 50 MHz	± 0.5 dB
TX Gain variation 500 MHz	± 1.5 dB
Gain Attenuation	31.5 dB in 0.5 dB Steps, 0.1 dB available

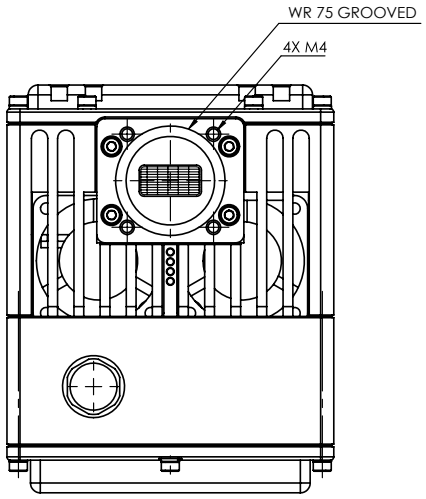

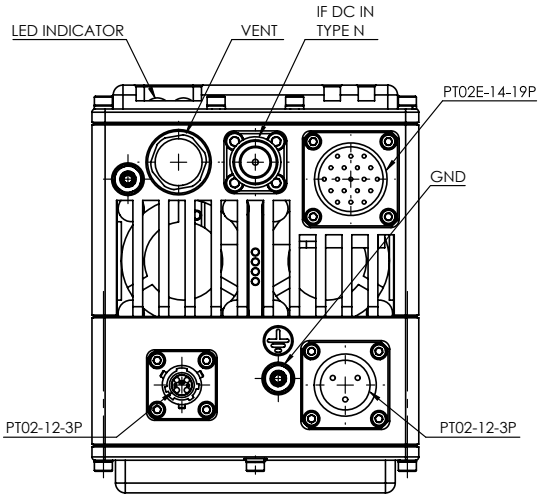

Amkom Design Group Inc.
2892 S Santa Fe Ave, Bldg, 115 San Marcos CA 92069