# ALX-60

THE WORLD'S SMALLEST OUTDOOR 60W X-Band BUC High Temp +70C

## FEATURES:

- Hyper-Light Package Design Only 4 lbs (1.8 kg)
- Extreme Stability, Reliability and Performance
- Built-in HPA Overdrive Circuit Protection
- Built-in Optimized Linearization
- Built-in Ultra Receive Band Reject Filter
- Built-in Anti Vibration Technology
- Extreme GaN Linearity and Efficiency
- Triple protection sealed waveguide output
- Field Replaceable IP69K Rated Fans
- Fully Assembled, and Rigorously Tested in the USA
- 3-Year Warranty

## DESIGN OVERVIEW:

The 'LIGHTWEIGHT' Series 7.9 - 8.4 GHz 60W X-band BUCs are the next generation of the world's most compact and efficient feed-horn & boom-arm mountable BUCs in the industry, weighing only 4 lbs (1.8 kg) and working at high temp up to 70°C.

## PERFORMANCE SPECIFICATIONS

| | |
|---|---|
| **Operating RF Frequency** | 7.9 - 8.4 GHz |
| **Operating IF frequency** | 950 - 1450 MHz |
| **Local Oscillator** | 6.95 GHz |
| **Rated Output Power PSAT**<br>**Linear Power SR @-26 dBc PLIN** | 60W 47.8 dBm<br>50W 47.0 dBm |
| **IMD3 (two tones) 3 dB Back Off** | -25 dBc max.<br>2 signal 5 MHz apart at P-LINEAR |
| **Spectral Regrowth at P-LINEAR**<br>**(QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2 dB back-off from rated power)** | -30 dBc |
| **10 MHz External Ref.**<br>**(Internal High Stability Optional)** | 10 MHz Ref. Level: 0 dBm +/- 5 dBm<br>Internal Ref. Stability +/- 0.1 ppm |

## COMPLIANCE INFORMATION

| | | |
|---|---|---|
| MIL-STD-188/164C<br>MIL-STD-461E | DO-160G | ROHS, REACH, WEEE |

## SPURIOUS & PHASE NOISE

| | |
|---|---|
| **In-Band/Out-band Spurious** | -60 dBc max. |
| **Group Delay** | Ripple 1 nsec point to point max. |
| **AM/PM Conversion** | 1.0°/dB max. at 3 dB output backoff |
| **Noise Power Density (TX)** | -85 dBm/Hz |
| **Noise Power Density (RX)** | -155 dBm/Hz |
| **Phase Noise**<br>**(Up Converter)\|(Ext. Ref.)** | -55 dBc/Hz @ 10 Hz -115 dBc/Hz<br>-65 dBc/Hz @ 100 Hz -135 dBc/Hz<br>-75 dBc/Hz @ 1 kHz -150 dBc/Hz<br>-85 dBc/Hz @ 10 kHz -155 dBc/Hz<br>-95 dBc/Hz @ 100 kHz -160 dBc/Hz |

## POWER CONSUMPTION

| | |
|---|---|
| **60W 47.8 dBm PSAT** | 180W |
| **50W 47.0 dBm PLIN** | 160W |

## PROTECTION

| | | |
|---|---|---|
| VOLTAGE | OVERTEMP | VSWR |
| SMART ALARMS IN THE M&C | MICROPHONIC | CURRENT |

## ENVIRONMENTAL SPECIFICATIONS

| | |
|---|---|
| **Environmental MIL-STD Vibration MIL-STD** | Compliant with WGS, MIL-STD-810E STD-188-164, and RTCA/DO-160G |
| **Operating Temperature Range** | - 40° C to + 70° C |
| **Storage Temperature Range** | - 60° C to + 85° C |
| **Fan Rating / Field Replaceable** | IP69K (fan module can be purchased separately) |
| **Humidity** | 100% Condensing, IP67 Rated |
| **Shock** | 20 g peak, 11 msec, 1/2 sine |
| **Altitude** | 50,000 ft, 15,240 m |
| **Built-in Receive Reject Filter** | Suppression by +60 dB (min) |

## M&C INTERFACE

| | |
|---|---|
| **Advanced Monitor & Control** | Ethernet Web Page Based, SNMP, RS232/485 |
| **ALARMS** | PLL LOCK, HPA, VSWR, MUTE, TX |
| **Stealth PLIN Operation Mode** | LED Shut-Off \| Silenced fans |
| **Administrative Interface (Optional)** | OpenBMIP through RS-422 |

## INPUT|OUTPUT INTERFACE

| | |
|---|---|
| **IF Connector** | N-type (50 Ohm) \| F-type (75 Ohm) |
| **Universal Prime Power via IF or MS/M&C Connector (7.0 A Current Limit Protection Through Coax)** | + 22 - 55 VDC |
| **Output VSWR** | 1.5:1 |
| **Output Interface** | CPR-112G, WR-90G, WR-112G |
| **Input VSWR** | 1.5:1 |

## GAIN

| | |
|---|---|
| **Gain (Temperature Compensated)** | 66 dB (min) 70 dB (typ.) |
| **Gain Flatness 1 MHz** | ± 0.1 dB |
| **Gain Flatness 36 MHz** | ± 0.5 dB |
| **Gain Flatness Full Band** | ± 1.5 dB |

## MECHANICAL SPECIFICATIONS

| | |
|---|---|
| **Dimensions (DC Powered)** | 6.55" x 4.4" x .3" (166.5 × 112 × 76 mm) Without Connectors |
| **Weight (DC Powered)** | 4 lbs (1.8 kg) |

## PART NUMBERING SYSTEM

AL - "LIGHTWEIGHT" MODEL SERIES
X - X-Band 7.9 - 8.4 GHz
20 | 30 | 40 | 50 | 60 | 80 | 100 - Rated Power in Watts
N | F - 50 Ohm or 75 Ohm IF Input Connector Type
M - Full M&C Option RS232/485, SNMP, Ethernet
A - AC Power 85-260VAC (increases size and weight)
R - 10 MHz Ref. Auto Sense | Internal Reference
K - FSK Option
U - Universal Mounting Bracket
J - Weatherproof DC/RJ45 Cable Dongle
C xxxx - Custom RAL Color Code
L - Custom Language
P - Custom Part number
B - Custom Label
G - Custom Logo
T - Redundancy Ready
H - High Gain (+79 dB - 82 dB)
W - Weatherproof Pelican Style Case
O - Other Custom Option
X - Custom Cable

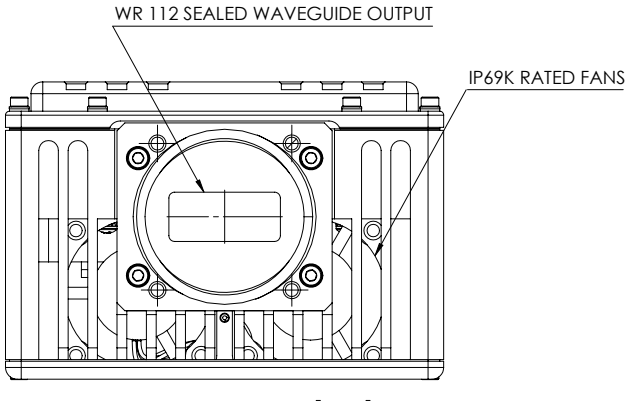


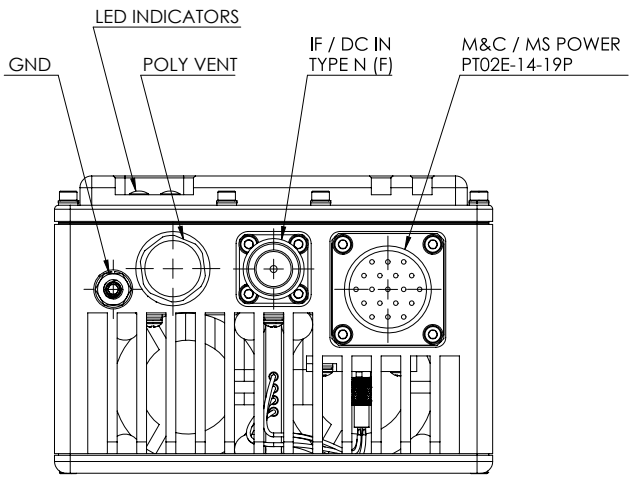


Visit Product Page

**Amkom Design Group Inc.**

2892 S Santa Fe Ave, Bldg, 115 San Marcos CA 92069